

ELECTRONIC RESET:


Turn on the blower (at any speed) - button 1.

Turn on the lights - button 2.

Press the "Timer" button (marked with a clock icon) - button 3.

A blinking red light will activate, indicating that the 15-minute timer is running.

After the 15-minute timer expires, the range hood will turn itself off, and complete the reset procedure.

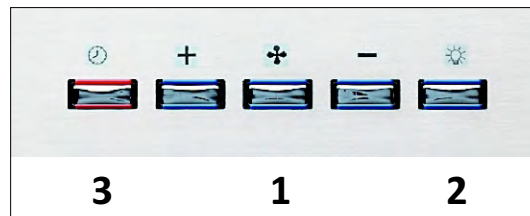

MANUAL RESET:

Remove the metal grease filter(s) to expose the blower motor (Fig. 1).

Unplug the black connection cable from the blower.

Check that all pins on the cable plug are on the same level (Fig. 2).

Check that all pins on the blower socket are on the same level (Fig. 3).

If any pins are recessed, use needle-nose pliers to pull them out to the same level as the rest.

Plug the connection cable back, and check the operation of the range hood.

